



## DRY MOULD SYSTEM DMS

Injection and Blow Moulding without  
mould condensation

When the surface temperature of an object sinks below the dew point of the ambient air, condensation builds on this object.

The answer to this problem is to create a dry climate around the mould. The **Dry Mould System (DMS)** fills the enclosed mould area with dry process air. Result: The DMS allows the usage of cold water with constant and optimal process temperature without the trouble of condensation.


Operating principle: Process air is running through the DMS in a closed loop circuit. When starting the unit "warm and moist" air in the mould area flows to the dehumidification unit DMS. In the DMS, the air is dehumidified with the help of a special refrigeration unit without the use of any chilled water. The processed air is then supplied to the mould area again, closing the loop.

## DMS Dry Mould System

Blue Air Systems guarantees condensation free production with a mould cooling temperature as low as 6°C throughout the year, in every weather, in every climate. This means higher productivity and constant product quality. The scope of supply is the dry mould system (standard units from 500 to 5.000 Nm<sup>3</sup>/h process air flow) and upon request a tailor made enclosure for the mould area of the production machine. Blue Air Systems uses sliding hoods or easy removable panels which provide simple handling in the production process (fast mould changes).

### Advantages:

- Condensation free production for optimal mould cooling temperature
- Dehumidification without the need of chilled water - NO PRECOOLER needed
- State of the art, PWM refrigeration technology for automatic regulated power consumption
- Process air running in closed loop circuit
- Same production conditions throughout the year
- Higher machine efficiency trough shorter cooling time
- Suitable for single production machines
- Low maintenance expenses
- Lowest energy consumption down to 0,0007 kW/m<sup>3</sup>
- Quick return on investment
- Option: germ- and virus-free with DMSterile

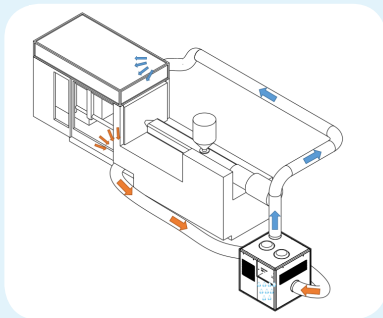

## DRY MOULD SYSTEM

Prevents mould condensation

Process air up to 5.000 Nm<sup>3</sup>/h  
Ø Energy consumption 0,0007 kW/m<sup>3</sup>